

# KD 477/2 12 LD 477/2

## QUICK SPECIFICS

**2**  
CYLINDER

**22.8** | **16.8** @ 3600 rpm  
HP | kW


**55.0** @ 2100 rpm  
Nm

(Power & torque N curve - 80/1269/CE e-ISO 1585)




## DATA

### DIMENSIONS (mm)

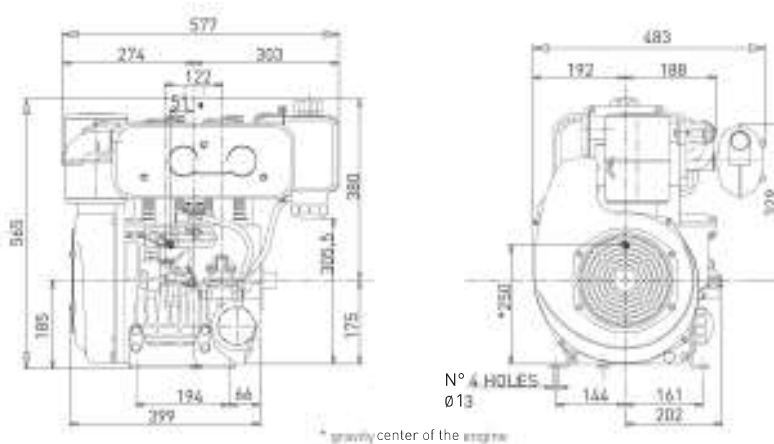

### PERFORMANCE CURVES (IFN- ISO 3046 AND ISO 14396)

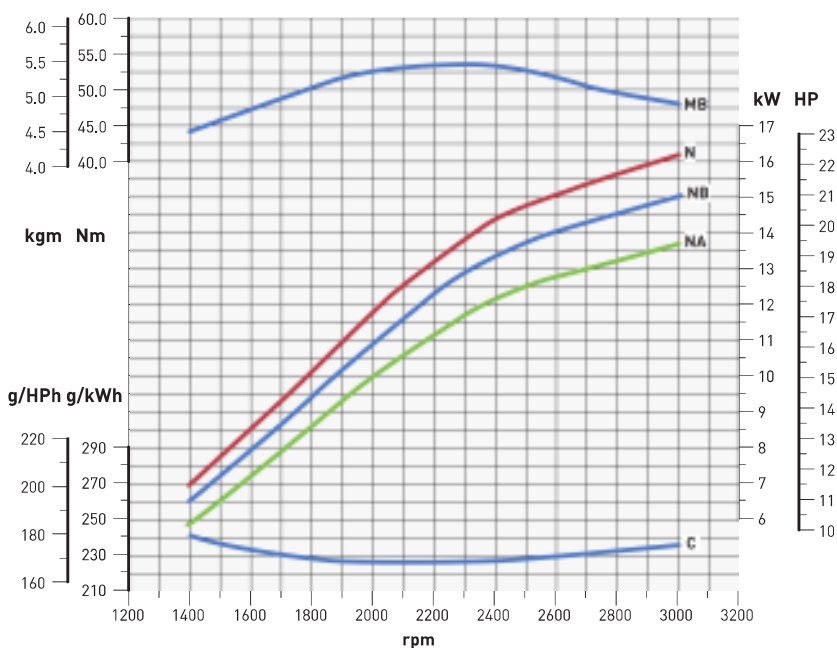

N - Power curve - 80/1269/CE E-ISO 1585

NB - Power curve - ISO 3046/1 -IFN

NA - Power curve - ISO 3046/1 - ICXN

MB - Torque curve - (NB curve)

C - Specific fuel consumption - (NB curve)

Power ratings refer to engines equiped with air filter, standard muffler, after being run in and in ambient conditions of 25°C and 1 bar. Power levels drop by 1% every 100m altitude and by 2% every 5°C above 25°C.