



Engine Yanmar 4TNV88

Type	Diesel, 4 Stroke
Cooling system	Water cooled
Cylinders	4
Displacement (c.c. - cu.in)	2190 - 133,5
Engine output (hp)	24,5
RPM	1500
Injection system	Direct
Governor	Mechanical
Lubrication system	Forced
Oil sump capacity (L - gal)	7,4 - 1,9
Stop system	Solenoid
Fuel tank capacity (L - gal)	40 - 10,5
Autonomy 3/4 load (h)	16
Starter battery (Ah-V)	80 -12
Battery charger (Ah-V)	15 -12
Starter motor (kW-V)	1,4 / 12

Generator

Type	Synchronous, 4 poles, selfexcited
Regulation	Compound
Voltage (V)	400 / 230
Frequency (Hz)	50
3-Phase data	
Voltage (V)	400
Max. output (kVA)	22
Cont.output (kVA)	20
Power factor (cos ø)	0,8
Single-Phase data	
Voltage (V)	230
Max. output (kVA)	5,3
Power factor (cos ø)	1
Insulation class	H
Voltage stability	±10%
Frequency stability	±5%

Soundproof cabin

- With frame and openable hoods made of steel panels and epoxidic paint.

Engine

- Easy access in case of maintenance to the feeding system, lubrication system and air filter.
- Safety stop in case of low oil pressure.
- Safety stop in case of high water temperature.
- Oil and fuel filters are easily accessible and easily replaceable.
- Water cooled engine with radiator.

Control panel


- The **mase** control panel for manual starting and stopping has been designed and built to combine all the control instruments and warning lights and protections both for the engine and the generator.
- Control panel is made of painted steel plate and include the following main equipment:
 - Voltmeter • 4-pole circuit breaker and earth fault device • 3-pole magnetothermal switch 16A • 1-pole magnetothermal switch • Electronic device for automatic shutdown of the engine in case of HWT and LOP • Emergency stop pushbutton • Ignition key • Warning light for high cooling water temperature and low oil pressure • Hourmeter • Socket 32A 400V 3P+N+G • Socket 16A 400V 3P+G N°2 Socket 2P+G 230V 16A

Generator


- Synchronous, 4 poles, self-excited
- Rotor and stator epoxidic resin coated against enviromental agents.
- Rotor dynamically balanced.
- Insulation class H.

MPF 22


STANDARD version (BA)

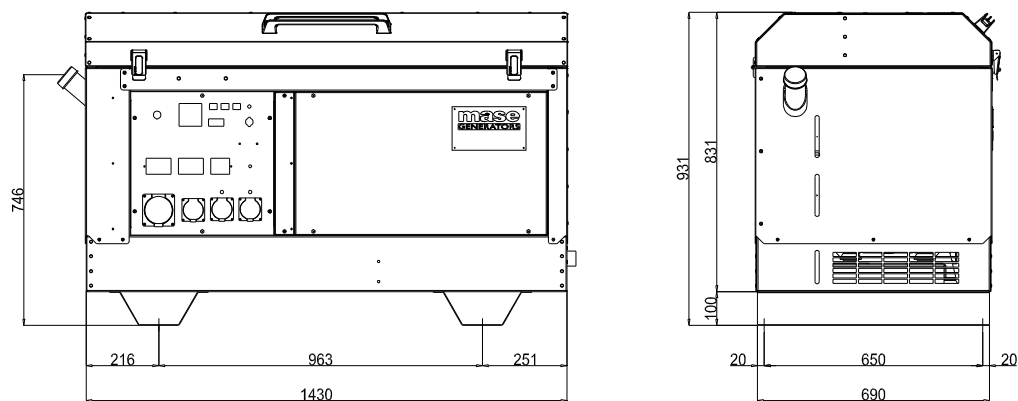

FIXED TOW version (TF)

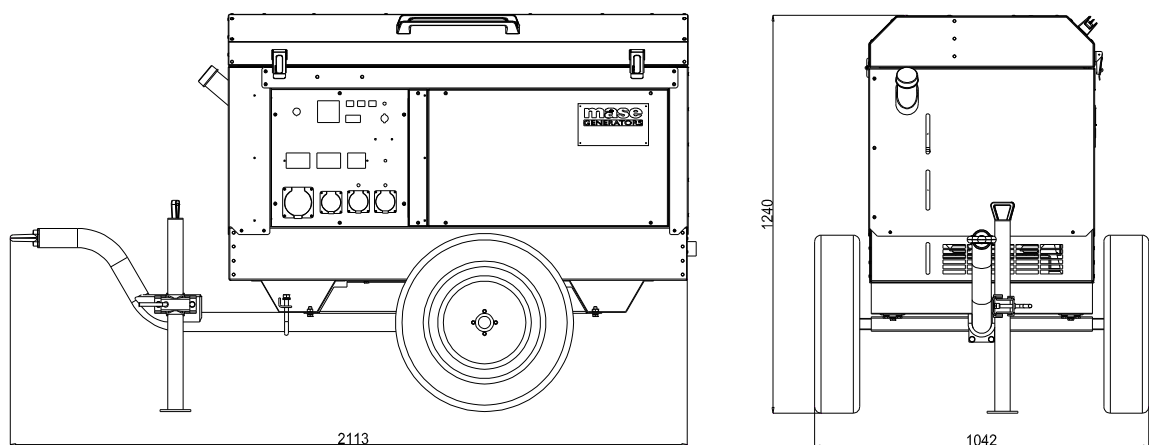

Automatic control panel and transfer switch version

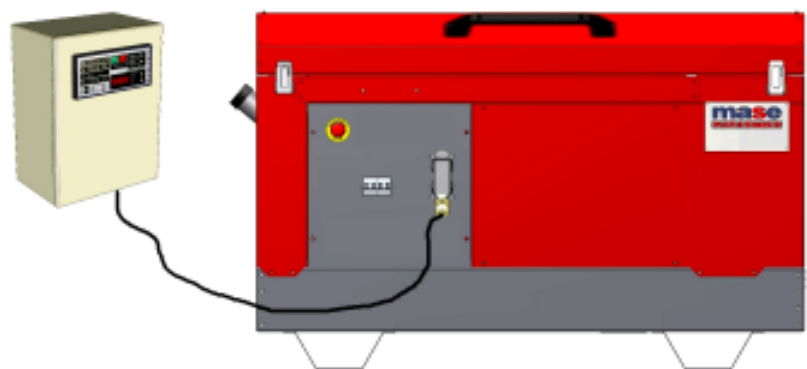

	MPF 22 BA	MPF 22 TF	
Lenght	1430 - 56,3	2113 - 83,2	mm - in
Width	690 - 27	1042 - 41	mm - in
Heigh	931 - 36,5	1240 - 48,8	mm - in
Weight	480 - 1058	510 - 1124	kg - lbs
Noise power level 96 LwA			

Dealer:

OPTIONALS: SITE TOW VERSION

*This drawing is only a reference and is not indicatly for the installation.
For more information, you may contact your local dealer or **mase** generators S.p.A.*

mase generators S.p.A. reserves the right to change the design or specifications without notice and without any obligations or liability whatsoever
For more information, you may contact your local **mase** dealer.

mase
GENERATORS

MASE GENERATORS S.p.a. Via Tortona, 345
47522 Cesena (FC) Italy
Tel.+39-0547-354311 Fax.+39-0547-357555
Email : mase@masegenerators.com